


SPF 3500~5000TL HVM-Pro

- Plug-and-Play terminal for PV and AC port
- Integrated MPPT charge controller
- It can work with battery or without battery
- Maximum PV input voltage up to 450VDC
- Configurable grid or solar input priority
- Optional WIFI/ GPRS remote monitoring
- Parallel for scalability

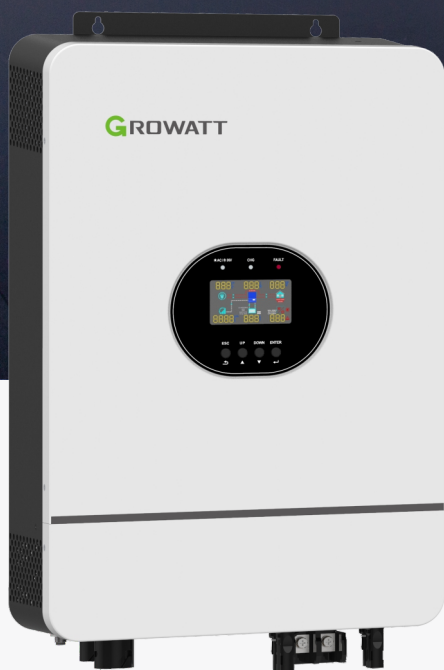

GROWATT

www.ginverter.com

P O W E R
- I N G
T O M O R R O W

Datasheet	SPF 3500TL HVM-Pro	SPF 5000TL HVM-Pro
Battery Voltage	48VDC	
Battery Type	Lithium/Lead-acid	
INVERTER OUTPUT		
Rated Power	3500VA/ 3500W	5000VA/ 5000W
Parallel Capability	Yes, 6 units maximum	
AC Voltage Regulation (Battery Mode)	230VAC \pm 5% @ 50/60Hz	
Surge Power	7000VA	10000VA
Efficiency (Peak)	93%	
Waveform	Pure sine wave	
Transfer Time	10ms typical, 20ms Max	
SOLAR CHARGER		
Maximum PV Array Power	4500W	6000W
MPPT Range @ Operating Voltage	120VDC ~ 430VDC	
Number of Independent MPP Trackers/ Strings Per MPP Tracker	1/1	
Maximum PV Array Open Circuit Voltage	450VDC	
Maximum Solar Charge Current	80A	100A
AC CHARGER		
Charge Current	60A	80A
AC Input Voltage	230 VAC	
Selectable Voltage Range	170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)	
Frequency Range	50Hz/60Hz (Auto sensing)	
PHYSICAL		
Protection Degree	IP20	
Dimension (W/H/D)	330/485/135mm	330/485/135mm
Net Weight	11.5kgs	12kgs
OPERATING ENVIRONMENT		
Humidity	5% to 95% Relative Humidity(Non-condensing)	
Altitude	<2000m	
Operating Temperature	0°C - 55°C	
Storage Temperature	-15°C - 60°C	